


**DUALRAYS D2™**  
**LED TRIPROOF LIGHT**

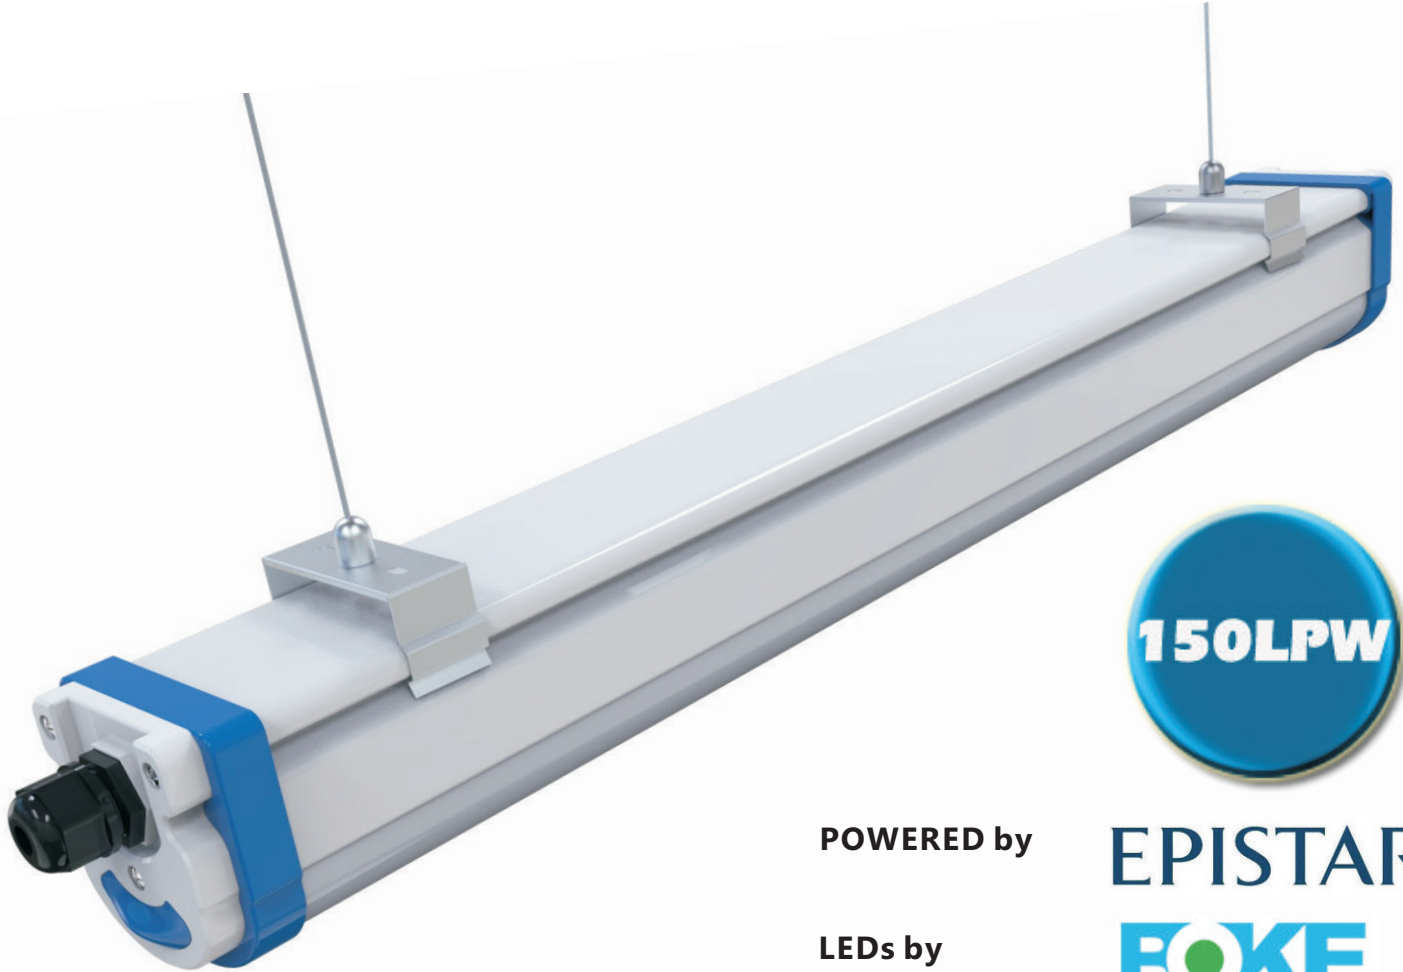

POWERED by

**EPISTAR**

LEDs by

**BOKE**

**IP65**

**LM79**


**LM80**



**PERFORMANCE DATA**

- Input Voltage: AC100~240V 50/60Hz
- Power: 20~80W
- Lumen: 3,000 ~ 12,000lm
- Up to 150LPW @ 100mA
- CCT: 3000/4000/5700/6500K±200K
- CRI >83Ra
- PF>0.90
- Calculated L70>50,000 H @ Ta 25°C (77°F)
- Work Temp: -40 ~ +50°C (-40°F)
- Guarantee: 3~5 years

## FEATURES

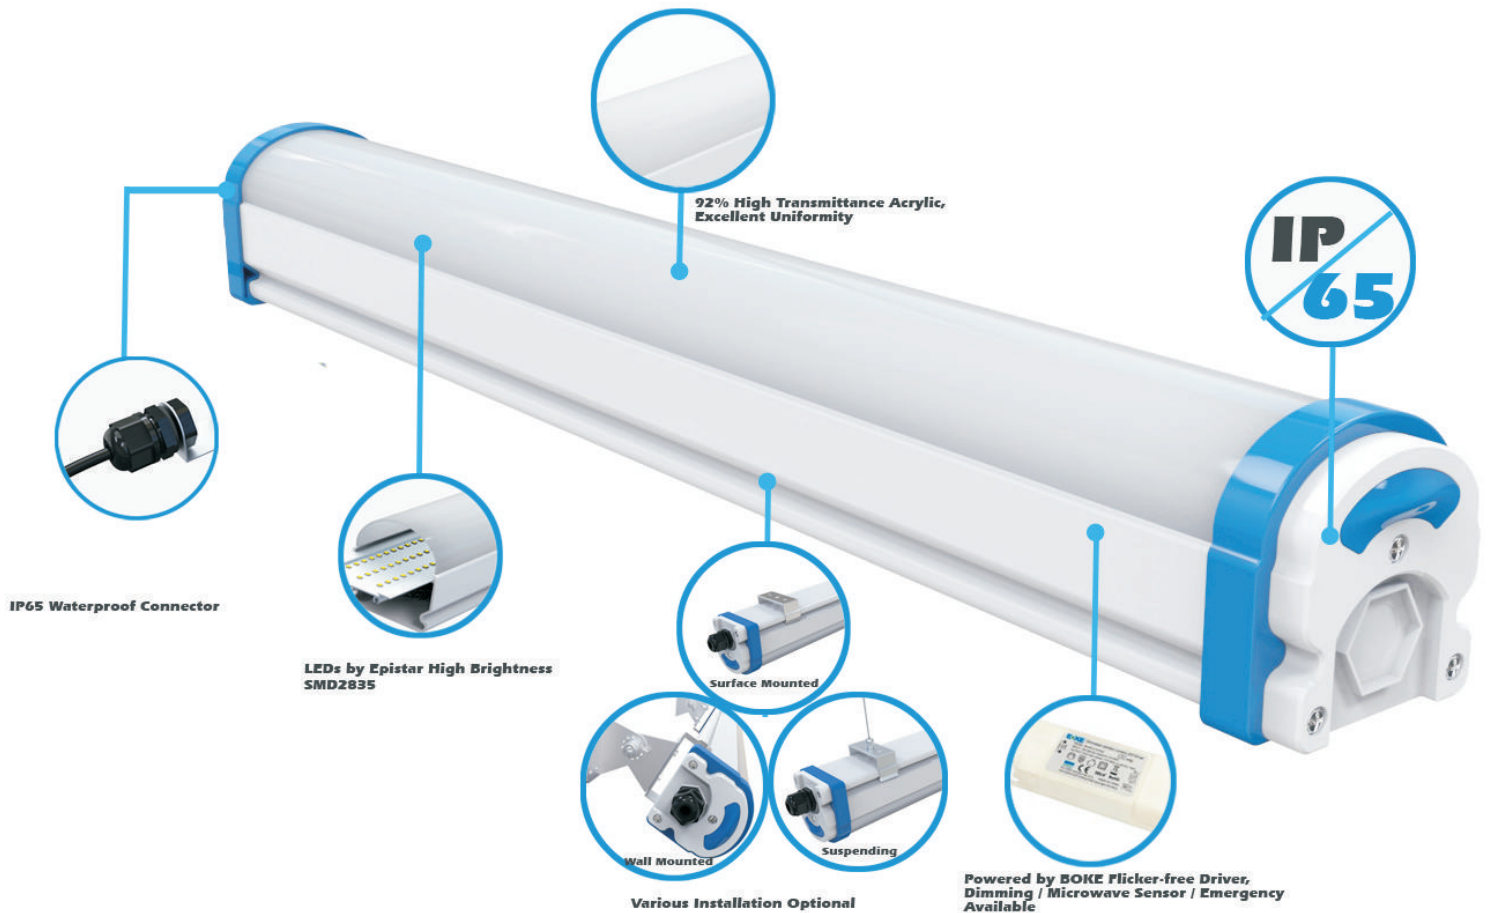

- Full plastic housing with high transmittance acrylic cover, light and economic design concept;
- Luminaire coated in an environmentally friendly polyester powder formulated for a durable and long-lasting color in a silvery, black and white finish. No toxic heavy metals, VOC, or mercury were used in the design
- BOKE flicker-free constant current driver is isolated away from the heat source of the LEDs, keeps the stability and performance of the driver for long life, quick responds, no flicker, lightning protection, PFC function, 0-10V, DALI dimming and PIR sensor
- 120LPW Proline Version, 150LPW Primeline Version for option, CRI>80Ra, more sufficient;
- 270° adjustable European Bracket for actual lighting direction;
- DALI, PIR, 1-10V dimming available, built-in daylight sensor available for intelligent;
- Suspended/Surface mounted/Adjustable installation for option;
- Built-in breathable valve to ensure excellent heat dissipation ability;
- Water-proof; Dust-proof; Damp-proof; Vapor-proof;
- CE, RoHS listed, LM-79/80 reports available, 3 to 5 years guarantee;

## APPLICATION

- Train, Bus station and Office
- Workshops and warehouse
- Supermarkets
- Exhibition center
- Airport Hall
- Corridor/Gallery/Corridor
- Underground garage

## ORDERING INFORMATION

SSL Series	Module Type	Power	Series No.	Market	Length	Driver
DR	TPL	050	B	G	5	1
DUALWAYS	Triproof Light	50W	B Class	Global Market	5ft	Economic Brand


### Remarks:

- The above ordering information is DR-TPL050-BG51 for example;
- Please consult your sales representative for opinions and the leading time will be varied depending on the options selected;

## ELECTRICAL DATA

Model No.	Quantity of LEDs	LEDs Driving Current	Rated Power
DR-TPL020-BG21	144PCS	40mA	20W
DR-TPL040-BG41	240PCS	35mA	40W
DR-TPL050-BG51	336PCS	40mA	50W

## DIMENSION and DIAGRAM

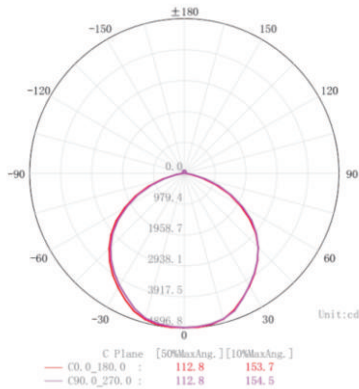

Model No.	Driver Current	CCT	Rated Power	Rated Lumen	Efficiency	L70@25°C	Driver Life @25°C
DR-TPL020-BG21	500mA	3000/4000/5700/6500K±200K	20W	3,000lm	150LPW	>50,000 Hrs	>50,000 Hrs
DR-TPL040-BG41	1000mA	3000/4000/5700/6500K±200K	40W	6,000lm	150LPW	>50,000 Hrs	>50,000 Hrs
DR-TPL050-BG51	1200mA	3000/4000/5700/6500K±200K	50W	7,500lm	150LPW	>50,000 Hrs	>50,000 Hrs

## INSTALLATION



Ceiling Mounted




Suspending



Adjustable Surface Mounted

## DIMENSION

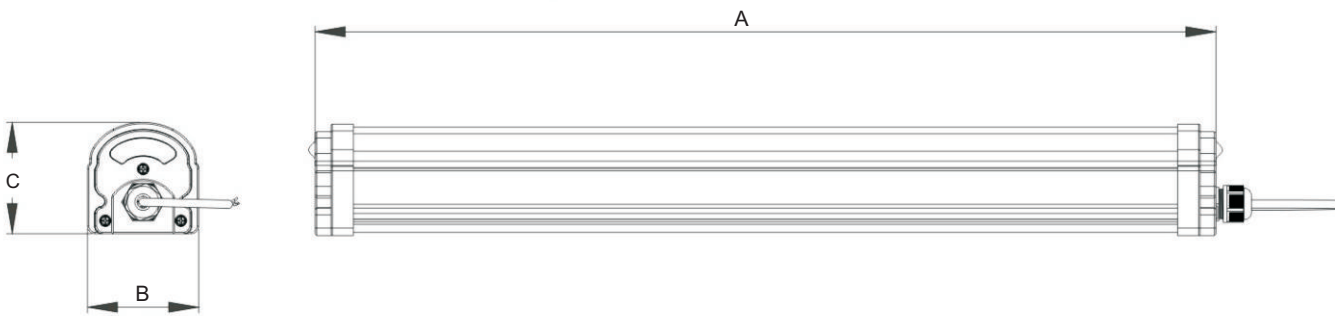

## PACKAGE INFORMATION

Model No.	QTY"/CTN (PCS)	N.W (Kg)	G.W (Kg)	Product Size A*B*C(mm)	Carton Size (mm)
DR-TPL020-BG21	10	11.6	13.2	600*74*74	670*440*200
DR-TPL040-BG41	8	15.4	17.5	1200*74*74	1270*360*200
DR-TPL050-BG51	8	18.2	20.6	1500*74*74	1570*360*200



**SHENZHEN DUALRAYS OPTOELECTRONICS Co.,LIMITED**  
 Tel: 0086-755-2306 6948  
 Fax: 0086-755-6164 1072  
 Web: [www.dualrays.com](http://www.dualrays.com)  
 Email: [info@dualrays.com](mailto:info@dualrays.com)  
 Add: 6th Floor, Building 10, Gangzai Industrial Park,  
 Furong Industrial Park, Xinqiao Industrial  
 District, Shajing, Bao'an District, Shenzhen 518125,  
 P.R.China